

June 21, 2022

Ben Legg BHL Group LLC 434-218-1410 ben@bhlgroupllc.com

Re: Soil Evaluation for Septic Permitting on a property located on Sweet Pea Lane, Belmont, North Carolina

Dear Mr. Legg:

This letter is in reference to a recent soil evaluation that our office conducted on the above referenced property on June 7, 2022. This evaluation was performed at your request in order to determine the feasibility of septic permitting for this lot.

The attached site map shows where soil documentation was finalized for the proposed design of a future septic system, as outlined in the .1900 regulations. In short, our findings showed that the property is **likely suitable** for a conventional septic using alternative aggregate product. It should be noted however, that while this is an advisory opinion, these results are not final until permitting is completed with the local Environmental Health Department.

If you have any questions about these findings and their implications for this property, please don't hesitate to call.


Sincerely,


Type Sge

Tyler Sgro, CPSS, NC LSS #1347 Davis Horizons

Davis Horizons


Email: tyler@davishorizons.com Phone: 843-754-6307 Legg - Sweet Pea Lane

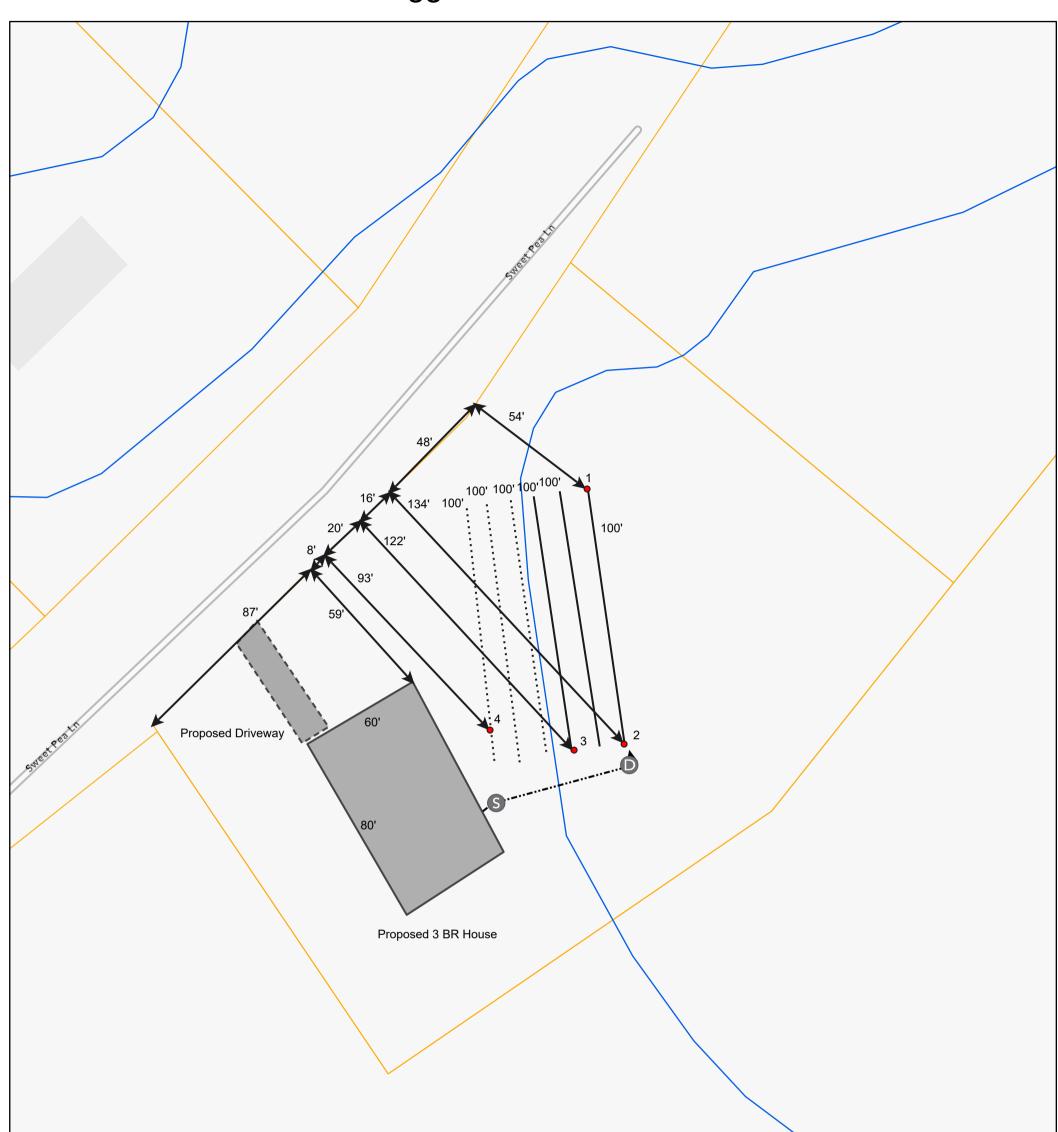



6/18/2022, 5:24:42 PM

Septic_Design_804 Septic_Design_9782 NC Soil Data Form • ↔ Distance/Setback House Septic_Design_8153 S Driveway Septic Tank **Drain Lines** D **Distribution Box Repair Lines** DEM20ft_Contours_2155 ---> Distribution Line NC1Map_Parcels_4875



Sources: Esri, HERE, Garmin, FAO, NOAA, USGS, © OpenStreetMap contributors, and the GIS User Community

Created By: Davis Horizons This map is created by Davis Horizons. Unauthorized use of this map without explicit written permission from Davis Horizons is prohibited.



ADDR PROPO SITE L WATE	ESS: 138 Sweet Pea L DSED FACILITY: Dw OCATION: 138 Sweet R SUPPLY: □ Priva UATION METHOD:	n relling et Pea Ln ate X Public	□ Well □ Pit □	PROPOSED DESIGN FLOW (.1949): 360 gpd Spring Other: Cut TYPE OF WASTEWATER: X Sewa			DATE EVALUATED: June 7, 2022 PROPERTY SIZE (in acres): 1.153 PROPERTY RECORDED:				
P R O F				SOIL MORPHOLOGY (.1941)		OTHER PROFILE FACTORS					
I L E #	.1940 LANDSCAPE POSITION/ SLOPE %/MEASURED ELEVATIONS (in ft.)	SOIL HORIZONATION	HORIZON DEPTH (IN.)	.1941 STRUCTURE/ TEXTURE	.1941 CONSISTENCE/ MINERALOGY	.1942 SOIL COLOR	.1942 SOIL WETNESS (CONCENTRATIONS) (DEPLETIONS)	.1943 SOIL DEPTH	.1956 SAPROLITE CLASS	.1944 RESTRICTIVE HORIZON	PROFILE CLASS & LTAR
1	Linear Slope / 1-5% / 259.7 ft.	А	0-2	GR / LS	VFR / SEXP	10yr 3/3		45	/	/	0.3 /PS
1	Linear Slope / 1-5% / 259.7 ft.	Е	2-19	GR / SL	VFR / SEXP	10yr 4/4		45	/	/	0.3 / PS
1	Linear Slope / 1-5% / 259.7 ft.	Bt	19-45	SBK/C	FR / SEXP	7.5yr 5/6	2.5yr 3/6 @ 40" 2.5yr 6/2 @ 40"	45	/	/	0.3 / PS
2	Linear Slope / 3-5% / 259.7 ft.	А	0-2	GR / LS	VFR / SEXP	10yr 3/3		45	/	/	0.3 / PS
2	Linear Slope / 3-5% / 259.7 ft.	Е	2-20	GR / SL	FR / SEXP	10yr 4/4		45	/	/	0.3 / PS
2	Linear Slope / 3-5% / 259.7 ft.	Bt	20-45	SBK / C	FI / SEXP	7.5yr 5/8	2.5yr 3/6 @ 38" 2.5yr 7/2 @ 38"	45	/	/	0.3 / PS
3	Linear Slope / 3-6% / 259 ft.	А	0-2	GR / LS	VFR / SEXP	10yr 3/3		45	/	/	0.3 / PS
3	Linear Slope / 3-6% / 259 ft.	Е	2-15	GR / SL	VFR / SEXP	10yr 5/4		45	/	/	0.3 / PS
3	Linear Slope / 3-6% / 259 ft.	Bt	15-45	SBK/C	FI / SEXP	7.5yr 5/6	2.5yr 3/6 @ 38" 2.5yr 7/1 @ 38"	45	/	/	0.3 / PS
4	Linear Slope / % / 258.8 ft.	А	0-2	GR / LS	VFR / SEXP	10yr 3/3		45	/	/	0.3 / PS
4	Linear Slope / % / 258.8 ft.	Е	2-10	GR / SL	VFR / SEXP	10yr 4/4		45	/	/	0.3 / PS
4	Linear Slope / % / 258.8 ft.	Bt	10-45	SBK / C	FI / SEXP	7.5yr 5/4	2.5yr 3/6 @ 36" 2.5yr 7/1 @ 36"	45	/	/	0.3 / PS



OWNER: Debruhl, Billy Wayne

DESCRIPTION INITIAL SYSTEM REPAIR SYSTEM Available Space (.1945) yes yes

Other Factors (.1946):

Site Classification (.1948): Provisionally Suitable (PS) APPLICATION DATE:

System Type(s)	IIa. Conventional Septic System (single-family or 480gpd or less)	IIa. Conventional Septic System (single-family or 480gpd or less)	Evaluated By:	Tyler Sgro, LSS # 1347					
Site LTAR	0.3	0.3	Others Present:						
Comments:									

SOIL REPORT Legg - Sweet Pea Lane

June 18, 2022

Prepared By: Tyler Sgro, L.P.S.C. #119, South Carolina Davis Horizons 843-754-6307 tyler@davishorizons.com







Site Location and Characteristics

The project site is located at 138 Sweet Pea Ln in Halifax County, North Carolina, identified by Tax ID number 0520026. Data was recorded on June 7, 2022, utilizing a soil auger. Elevation data recorded at these locations shows elevations ranging no more than 11 inches between sample points.

Soil Sampling Methodology

In order to measure site elevations, a Trimble R10-2 external GNSS receiver was used to measure elevations at each soil boring location. Fixed real-time kinematic (RTK) positioning was obtained in order to maximize data accuracy. Elevation error was measured to not exceed 1 inch, based on data provided from the GNSS receiver. Orthometric elevation data was recorded at each data point and recorded on the subsequent data sheet. Elevation ranges between the soil borings were obtained by computing the difference between elevation points. In total, 4 data points were recorded for the purposes of finalizing the footprint of the proposed drainfield and associated repair area.

Applicable Regulations

Recorded soil documentation, included suitability considerations, were observed based on criteria found in the North Carolina Administrative Code, Subchapter 18A, Section 1900, titled "Sewage Treatment and Disposal Systems." Soil conditions such as soil texture, soil structure, soil consistency, soil mineralogy, soil color, soil wetness, observed soil depth, saprolite class, restrictive horizon presence, and subsequent loading rates were identified in accordance with this Section.

This report and subsequent design are being submitted for review under North Carolina Session Law 2018-114 (HB374). As such, the following required statement is included to meet the requirement of the law: <u>"The LSS Evaluation is being submitted pursuant to and meets the requirements of SL 2018-114 Section 11.(c)."</u>

Design Criteria and Recommendations

Soil wetness conditions were observed at a depth of 38 inches. No restrictive horizon was observed in the soil profile. A minimum of a twelve inch separation between soil wetness/restrictive horizons and trench bottoms must be maintained. Horizons with more than trace amounts of organic carbon content existed to maximum depths of 2 inches. The aforementioned soil horizons with more than trace amounts of soil organic carbon do not need to be removed. However, the root mat should be removed prior to adding fill material if required.

A long-term acceptance rate (LTAR) of 0.3 gallons per day (GPD)/square foot (SF) will be utilized for the loading rate². At the completion of the construction of the drain field/disposal area, the fill material over this area will be immediately seeded and protected with straw or mulch or sodded to establish a permanent vegetative cover. Any concerns regarding surface water flow and/or improvement of subsurface drainage conditions should be taken into account by the installer prior to system installation. If questions regarding the final drainage plan arise, this office should be notified for consultation prior to the initiation of work.

Based on the observed soil conditions and applicable regulations, it was determined that a IIa. Conventional Septic System (single-family or 480gpd or less) would be applicable for this site. Based on an expected flow rate of 360 gpd, the minimum linear footage required for the system is 400 total linear feet.

The proposed system will utilize 3-foot wide trenches with 12 inch Infiltrator Quick 4 Chambers. The system should be installed at a maximum depth of 24 inches. The system should be installed level and along the contour lines, as referenced in the associated site plan included with this report. The repair area will have design parameters identical to that of the primary drainfield.

Soil Classification & Site Suitability

The soils in this area formed from metamorphic rock typical of the Piedmont and in relation to the site's geomorphic position on the landscape. Thus, the soil conditions reflect drainage characteristics typical of soils of the mapped series below. This soil classification was based on the observed soil morphology in the excavated soil profile. Descriptions to further depths are not necessary to make interpretations for onsite wastewater disposal systems. The soil observations provided in this report and the below classification are derived by soil conditions in the observed sampled locations/area only. It should be noted that the below classification does not take into account any inclusions that might exist with the sampled area. Based on the recorded soil data, related soil classification below, and applicable suitability parameters listed in Section .1900, it is recommended that this site be considered **Provisionally Suitable (S)** for the placement of the engineered designed septic system.

Similar to soils of the Cecil series: Fine, Kaolinitic, Thermic Typic Kanhapludults

Other Considerations





Adherence to Report:

The depth to the soil wetness conditions, restrictive horizon(s), trench bottom separation, LTAR, and the land preparation prescriptions outlined in this report are site condition minimums that must be adhered to in the design and installation of an onsite wastewater disposal system. Any expenses incurred due to deviations from the soil prescriptions outlined in this report that result in system malfunctions or repairs will be the liability of the responsible party completing the onsite installation and/or grading work.

Notification Regarding Wetlands:

It is the responsibility of the landowner and/or equipment operators to avoid regulated impacts to waters of the United States (WOTUS), including wetlands. Should any part of the proposed onsite wastewater system be located in WOTUS, including wetlands, approval from the appropriate State and/or Federal agency [i.e., US Army Corps of Engineers, NC Div. of Coastal Management, etc.] must accompany the application for an engineered onsite wastewater system. It is recommended that the landowner and/or equipment operators contact the applicable State and/or Federal agencies prior to initiating site work in order to avoid regulated impacts to WOTUS, including wetlands.



Footnotes:

^{1.} Fill material must be inspected and approved by Tyler Sgro prior to placement of material and system installation, if required.

^{2.} Long-term acceptance rates (LTAR) are **estimated** using calculations provided in Rules .1901 - .1968 of Title 15A Subchapter 18A of the North Carolina Administrative Code (T15A.18A .1901 - .1968). The long-term acceptance rate is based on the most hydraulically limiting naturally occurring soil texture from the ground surface to 12 inches below the bottom of the proposed absorption trenches/disposal tubing. Estimates on the acceptance rates are based on soil texture and other applicable soil morphology.